

Single Multi-block hanger, with angle member adapter

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.



picture shows MBHS78-3-F for illustration purpose

FEATURES / BENEFITS

- ➔ Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- ➔ They come including angle member adapter and necessary hardware.
- ➔ The angle member adapter fastens the clamp to the tower without drilling.
- ➔ The angle member adapter includes a tower member set screw.
- ➔ The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- ➔ Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.

Technical Features

GENERAL SPECIFICATIONS

| | | |
|------------------------|--|---------------------------|
| Product Line | | Coaxial Cable Accessories |
| Product Type | | Hanger |
| Hanger Type | | Single Multi-block |
| Transmission Line Type | | LCF158 |
| Cable Type | | Coaxial Foam Dielectric |
| Color | | Black |

MECHANICAL SPECIFICATIONS


| | | |
|-------------------------------------|---------|---|
| Cable Size | | 1-5/8" |
| Number of Cable / Waveguide Runs | | 1 per layer, 3 layers, 3 runs |
| Configuration | | incl. Angle member adapter |
| Angle member adapter clamping range | mm (in) | 4 / 24 (0.157 / 0.945) |
| Angle member adapter threads | | 2x M8 |
| Material | | Metal part: Stainless steel Plastic parts: Polypropylene |
| Length | mm (in) | 324 (12.75) see picture below (L) |
| Height | mm (in) | 92 (3.62) see picture below (H) |
| Width | mm (in) | 54 (2.13) see picture below (W) |
| Recommended / Maximum Clamp Spacing | m (ft) | 0.7 / 1.5 (2.2 / 5) |

PACKAGING INFORMATION

| | | |
|---|---------|-----------------------------------|
| Package Quantity | | 10 |
| Weight per piece | kg (lb) | 0.38 (0.83) |
| Weight per kit | kg (lb) | 4 (8.81) |
| Box Dimensions (Bulk Shipping), L x W x H | mm (in) | 230 x 180 x 300(9.0 x 7.0 x 11.8) |



Single Multi-block hanger, with angle member adapter

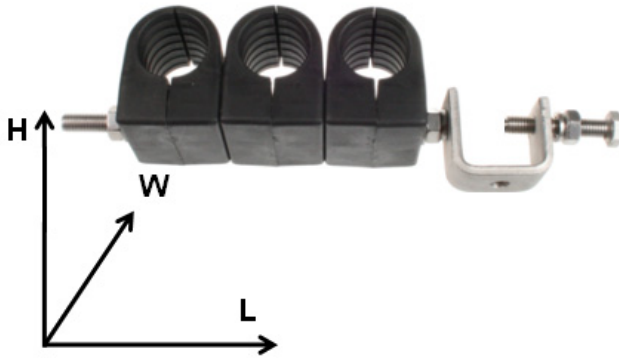

picture shows MBHS78-3-F for illustration purpose

External Document Links

[Installation Instruction](#)

Notes

For applications under wind speed conditions from 160 km/h (100 mph) up to 200 km/h (125 mph) a maximum clamp spacing of 0.7m (2.3 ft) must not be exceeded.