

Single Multi-block hanger two layer, with hot dip galvanized angle member adapter

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.



picture shows MBHS78-2-F-H for illustration purpose

FEATURES / BENEFITS

- ➔ Single Multi Blocks are manufactured of polypropylene -> thus providing thermal, chemical and UV resistance in all environments.
- ➔ They come complete with angle member adapter and all necessary hardware -> no additional parts required
- ➔ The angle member adapter fastens the clamp to the tower without drilling -> improving speed and avoiding issues with tower static and corrosion.
- ➔ The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member -> will fit any installation scenario.
- ➔ Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.

Technical Features

GENERAL SPECIFICATIONS

Product Line		Coaxial Cable Accessories Hybrid Cable Accessories
Product Type		Hanger
Hanger Type		Single Multi-block
Transmission Line Type		LCF12 HCA12-50 HB013
Cable Type		Coaxial Foam Dielectric Hybrid
Color		Black

MECHANICAL SPECIFICATIONS


Cable Size		1/2"
Number of Cable / Waveguide Runs		1 per layer, 2 layers, 2 runs
Configuration		incl. Angle member adapter
Angle member adapter clamping range	mm (in)	4 / 24 (0.157 / 0.945)
Angle member adapter threads		2x M8
Material		Metal parts: - Connecting devices: Stainless steel - Cleat: Hot dip galvanized steel Plastic parts: Polypropylene
Length	mm (in)	155 (6.10) see picture below (L)
Height	mm (in)	50 (1.96) see picture below (H)
Width	mm (in)	50 (1.96) see picture below (W)
Recommended / Maximum Clamp Spacing	m (ft)	0.6 / 1 (2 / 3.25)

PACKAGING INFORMATION

Package Quantity		10
Weight per piece	kg (lb)	0.178 (0.39)
Weight per kit	kg (lb)	2 (4.41)
Box Dimensions (Bulk Shipping), L x W x H	mm (in)	280 x 280 x 55 (11.02 x 11.02 x 2.16)



Single Multi-block hanger two layer, with hot dip galvanized angle member adapter

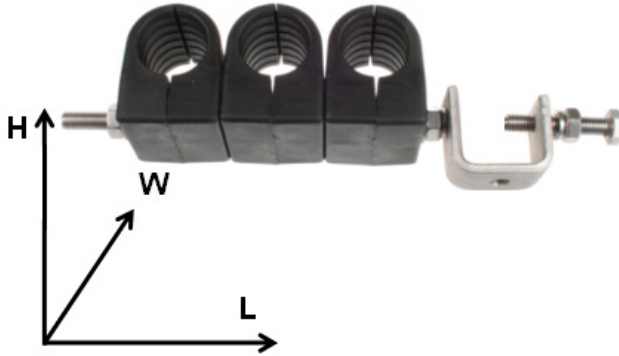

picture shows MBHS78-3-F-H for illustration purpose

External Document Links

[Installation Instruction](#)

Notes

For applications with extreme focus on long term esthetical appearance or under adverse environmental conditions the use of all stainless steel versions should be considered